

TIERA

SCULPTED BY NATURE

COLOR	WIDTH	GRADE
Laguna	7 1/2"	Select

DESCRIPTION

Product: Multi-layer Engineered Hardwood
Flooring - Planks

COMPOSITION

Engineered for superior stability and durability, the structure combines a high-performance Marine-Grade Phenolic Birch Plywood core with White Oak top layer. Both layers are bonded with polyvinyl acetate adhesives in accordance with CARB Phase 2 compliance standards.

PRODUCT DIMENSIONS

Total thickness (in)	5/8" (15mm)
Top Layer thickness (mm)	4 mm
Plywood thickness (mm)	11 mm
Length	75"- 75% fixed lengths
Width (in)	7 1/2"

DIMENSIONS TOLERANCES

Length	Nominal $\pm$ 0.1%
Width	Nominal $\pm$ 0.2%
Cupping	0.2% of nominal width
Banana	0.1% nominal length

BOX INFORMATION

Pcs/box	4
Weight/box	34.4
Sq.ft./box	15.54



GRADE

Select, solid knots up to 10 mm permitted in less 10% of the material. Open knots with fill, not permitted. Repaired cracks or splits within the planks are not permitted. No filled cracks/splits on the ends of the planks. Natural color variation is to be expected. Sapwood may be present and allowed if the color blends into the plank. No bleached sapwood allowed.

Finish	PPG UV Lacquer
Impact Resistance	Ø medium of deep 8.59 mm
Dimensional Stability	Movement $\leq$ 0.29%
Formaldehyde Emission	E0. CARB2 Comply
Thermal conductivity	0.14W/moK
Noise & Impact Isolation	ΔL_w : 17 dB
Fire Reaction	Cfl-S1
Profiling System	Tongue & Groove, beveled 4 sides
Warranty	www.rivaspain.com/resources
Maintenance & Instructions	www.rivaspain.com/resources

Certificates



TIERA

SCULPTED BY NATURE

COLOR	WIDTH	GRADE
Laguna	7 1/2"	Character

DESCRIPTION

Product: Multi-layer Engineered Hardwood
Flooring - Planks

COMPOSITION

Engineered for superior stability and durability, the structure combines a high-performance Marine-Grade Phenolic Birch Plywood core with White Oak top layer. Both layers are bonded with polyvinyl acetate adhesives in accordance with CARB Phase 2 compliance standards.

PRODUCT DIMENSIONS

Total thickness (in)	5/8" (15mm)
Top Layer thickness (mm)	4 mm
Plywood thickness (mm)	11 mm
Length	75"- 75% fixed lengths
Width (in)	7 1/2"

DIMENSIONS TOLERANCES

Length	Nominal $\pm$ 0.1%
Width	Nominal $\pm$ 0.2%
Cupping	0.2% of nominal width
Banana	0.1% nominal length

BOX INFORMATION

Pcs/box	4
Weight/box	34.4
Sq.ft./box	15.54



GRADE

Character solid knots up to 3" (70mm) permitted. Open knots with fill less than 2" (50mm). Repaired cracks or splits within the planks are permitted. No filled cracks/splits on the ends of the planks. Natural color variation is to be expected. Sapwood may be present and allowed if the color blends into the plank. No bleached sapwood allowed.

Finish	PPG UV Lacquer
Impact Resistance	Ø medium of deep 8.59 mm
Dimensional Stability	Movement $\leq$ 0.29%
Formaldehyde Emission	E0. CARB2 Comply
Thermal conductivity	0.14W/moK
Noise & Impact Isolation	Δ Lw: 17 dB
Fire Reaction	Cfl-S1
Profiling System	Tongue & Groove, beveled 4 sides
Warranty	www.rivaspain.com/resources
Maintenance & Instructions	www.rivaspain.com/resources

Certificates



TIERA

SCULPTED BY NATURE

COLOR	WIDTH	GRADE
Arena	7 1/2"	Select

DESCRIPTION

Product: Multi-layer Engineered Hardwood
Flooring - Planks

COMPOSITION

Engineered for superior stability and durability, the structure combines a high-performance Marine-Grade Phenolic Birch Plywood core with White Oak top layer. Both layers are bonded with polyvinyl acetate adhesives in accordance with CARB Phase 2 compliance standards.

PRODUCT DIMENSIONS

Total thickness (in)	5/8" (15mm)
Top Layer thickness (mm)	4 mm
Plywood thickness (mm)	11 mm
Length	75" - 75% fixed lengths
Width (in)	7 1/2"

DIMENSIONS TOLERANCES

Length	Nominal $\pm$ 0.1%
Width	Nominal $\pm$ 0.2%
Cupping	0.2% of nominal width
Banana	0.1% nominal length

BOX INFORMATION

Pcs/box	4
Weight/box	34.4
Sq.ft./box	15.54



GRADE

Select, solid knots up to 10 mm permitted in less 10% of the material. Open knots with fill, not permitted. Repaired cracks or splits within the planks are not permitted. No filled cracks/splits on the ends of the planks. Natural color variation is to be expected. Sapwood may be present and allowed if the color blends into the plank. No bleached sapwood allowed.

Finish	PPG UV Lacquer
Impact Resistance	Ø medium of deep 8.59 mm
Dimensional Stability	Movement $\leq$ 0.29%
Formaldehyde Emission	E0. CARB2 Comply
Thermal conductivity	0.14W/moK
Noise & Impact Isolation	ΔLw : 17 dB
Fire Reaction	Cfl-S1
Profiling System	Tongue & Groove, beveled 4 sides
Warranty	www.rivaspain.com/resources
Maintenance & Instructions	www.rivaspain.com/resources

Certificates



TIERA

SCULPTED BY NATURE

COLOR	WIDTH	GRADE
Arena	7 1/2"	Character

DESCRIPTION

Product: Multi-layer Engineered Hardwood
Flooring - Planks

COMPOSITION

Engineered for superior stability and durability, the structure combines a high-performance Marine-Grade Phenolic Birch Plywood core with White Oak top layer. Both layers are bonded with polyvinyl acetate adhesives in accordance with CARB Phase 2 compliance standards.

PRODUCT DIMENSIONS

Total thickness (in)	5/8" (15mm)
Top Layer thickness (mm)	4 mm
Plywood thickness (mm)	11 mm
Length	75"- 75% fixed lengths
Width (in)	7 1/2"

DIMENSIONS TOLERANCES

Length	Nominal $\pm$ 0.1%
Width	Nominal $\pm$ 0.2%
Cupping	0.2% of nominal width
Banana	0.1% nominal length

BOX INFORMATION

Pcs/box	4
Weight/box	34.4
Sq.ft./box	15.54



GRADE

Character solid knots up to 3" (70mm) permitted. Open knots with fill less than 2" (50mm). Repaired cracks or splits within the planks are permitted. No filled cracks/splits on the ends of the planks. Natural color variation is to be expected. Sapwood may be present and allowed if the color blends into the plank. No bleached sapwood allowed.

Finish	PPG UV Lacquer
Impact Resistance	Ø medium of deep 8.59 mm
Dimensional Stability	Movement $\leq$ 0.29%
Formaldehyde Emission	E0. CARB2 Comply
Thermal conductivity	0.14W/moK
Noise & Impact Isolation	Δ Lw: 17 dB
Fire Reaction	Cfl-S1
Profiling System	Tongue & Groove, beveled 4 sides
Warranty	www.rivaspain.com/resources
Maintenance & Instructions	www.rivaspain.com/resources

Certificates



TIERA

SCULPTED BY NATURE

COLOR	WIDTH	GRADE
Monte	7 1/2"	Select

DESCRIPTION

Product: Multi-layer Engineered Hardwood
Flooring - Planks

COMPOSITION

Engineered for superior stability and durability, the structure combines a high-performance Marine-Grade Phenolic Birch Plywood core with White Oak top layer. Both layers are bonded with polyvinyl acetate adhesives in accordance with CARB Phase 2 compliance standards.

PRODUCT DIMENSIONS

Total thickness (in)	5/8" (15mm)
Top Layer thickness (mm)	4 mm
Plywood thickness (mm)	11 mm
Length	75" - 75% fixed lengths
Width (in)	7 1/2"

DIMENSIONS TOLERANCES

Length	Nominal $\pm$ 0.1%
Width	Nominal $\pm$ 0.2%
Cupping	0.2% of nominal width
Banana	0.1% nominal length

BOX INFORMATION

Pcs/box	4
Weight/box	34.4
Sq.ft./box	15.54



GRADE

Select, solid knots up to 10 mm permitted in less 10% of the material. Open knots with fill, not permitted. Repaired cracks or splits within the planks are not permitted. No filled cracks/splits on the ends of the planks. Natural color variation is to be expected. Sapwood may be present and allowed if the color blends into the plank. No bleached sapwood allowed.

Finish	PPG UV Lacquer
Impact Resistance	Ø medium of deep 8.59 mm
Dimensional Stability	Movement $\leq$ 0.29%
Formaldehyde Emission	E0. CARB2 Comply
Thermal conductivity	0.14W/moK
Noise & Impact Isolation	Δ Lw: 17 dB
Fire Reaction	Cfl-S1
Profiling System	Tongue & Groove, beveled 4 sides
Warranty	www.rivaspain.com/resources
Maintenance & Instructions	www.rivaspain.com/resources

Certificates



TIERA

SCULPTED BY NATURE

COLOR	WIDTH	GRADE
Monte	7 1/2"	Character

DESCRIPTION

Product: Multi-layer Engineered Hardwood
Flooring - Planks

COMPOSITION

Engineered for superior stability and durability, the structure combines a high-performance Marine-Grade Phenolic Birch Plywood core with White Oak top layer. Both layers are bonded with polyvinyl acetate adhesives in accordance with CARB Phase 2 compliance standards.

PRODUCT DIMENSIONS

Total thickness (in)	5/8" (15mm)
Top Layer thickness (mm)	4 mm
Plywood thickness (mm)	11 mm
Length	75"- 75% fixed lengths
Width (in)	7 1/2"

DIMENSIONS TOLERANCES

Length	Nominal $\pm$ 0.1%
Width	Nominal $\pm$ 0.2%
Cupping	0.2% of nominal width
Banana	0.1% nominal length

BOX INFORMATION

Pcs/box	4
Weight/box	34.4
Sq.ft./box	15.54



GRADE

Character solid knots up to 3" (70mm) permitted. Open knots with fill less than 2" (50mm). Repaired cracks or splits within the planks are permitted. No filled cracks/splits on the ends of the planks. Natural color variation is to be expected. Sapwood may be present and allowed if the color blends into the plank. No bleached sapwood allowed.

Finish	PPG UV Lacquer
Impact Resistance	Ø medium of deep 8.59 mm
Dimensional Stability	Movement $\leq$ 0.29%
Formaldehyde Emission	E0. CARB2 Comply
Thermal conductivity	0.14W/moK
Noise & Impact Isolation	Δ Lw: 17 dB
Fire Reaction	Cfl-S1
Profiling System	Tongue & Groove, beveled 4 sides
Warranty	www.rivaspain.com/resources
Maintenance & Instructions	www.rivaspain.com/resources

Certificates



TIERA

SCULPTED BY NATURE

COLOR	WIDTH	GRADE
Sierra	7 1/2"	Select

DESCRIPTION

Product: Multi-layer Engineered Hardwood
Flooring - Planks

COMPOSITION

Engineered for superior stability and durability, the structure combines a high-performance Marine-Grade Phenolic Birch Plywood core with White Oak top layer. Both layers are bonded with polyvinyl acetate adhesives in accordance with CARB Phase 2 compliance standards.

PRODUCT DIMENSIONS

Total thickness (in)	5/8" (15mm)
Top Layer thickness (mm)	4 mm
Plywood thickness (mm)	11 mm
Length	75"- 75% fixed lengths
Width (in)	7 1/2"

DIMENSIONS TOLERANCES

Length	Nominal $\pm$ 0.1%
Width	Nominal $\pm$ 0.2%
Cupping	0.2% of nominal width
Banana	0.1% nominal length

BOX INFORMATION

Pcs/box	4
Weight/box	34.4
Sq.ft./box	15.54



GRADE

Select, solid knots up to 10 mm permitted in less 10% of the material. Open knots with fill, not permitted. Repaired cracks or splits within the planks are not permitted. No filled cracks/splits on the ends of the planks. Natural color variation is to be expected. Sapwood may be present and allowed if the color blends into the plank. No bleached sapwood allowed.

Finish	PPG UV Lacquer
Impact Resistance	Ø medium of deep 8.59 mm
Dimensional Stability	Movement $\leq$ 0.29%
Formaldehyde Emission	E0. CARB2 Comply
Thermal conductivity	0.14W/moK
Noise & Impact Isolation	ΔLw : 17 dB
Fire Reaction	Cfl-S1
Profiling System	Tongue & Groove, beveled 4 sides
Warranty	www.rivaspain.com/resources
Maintenance & Instructions	www.rivaspain.com/resources

Certificates



TIERA

SCULPTED BY NATURE

COLOR	WIDTH	GRADE
Sierra	7 1/2"	Character

DESCRIPTION

Product: Multi-layer Engineered Hardwood
Flooring - Planks

COMPOSITION

Engineered for superior stability and durability, the structure combines a high-performance Marine-Grade Phenolic Birch Plywood core with White Oak top layer. Both layers are bonded with polyvinyl acetate adhesives in accordance with CARB Phase 2 compliance standards.

PRODUCT DIMENSIONS

Total thickness (in)	5/8" (15mm)
Top Layer thickness (mm)	4 mm
Plywood thickness (mm)	11 mm
Length	75"- 75% fixed lengths
Width (in)	7 1/2"

DIMENSIONS TOLERANCES

Length	Nominal $\pm$ 0.1%
Width	Nominal $\pm$ 0.2%
Cupping	0.2% of nominal width
Banana	0.1% nominal length

BOX INFORMATION

Pcs/box	4
Weight/box	34.4
Sq.ft./box	15.54



GRADE

Character solid knots up to 3" (70mm) permitted. Open knots with fill less than 2" (50mm). Repaired cracks or splits within the planks are permitted. No filled cracks/splits on the ends of the planks. Natural color variation is to be expected. Sapwood may be present and allowed if the color blends into the plank. No bleached sapwood allowed.

Finish	PPG UV Lacquer
Impact Resistance	Ø medium of deep 8.59 mm
Dimensional Stability	Movement $\leq$ 0.29%
Formaldehyde Emission	E0. CARB2 Comply
Thermal conductivity	0.14W/moK
Noise & Impact Isolation	Δ Lw: 17 dB
Fire Reaction	Cfl-S1
Profiling System	Tongue & Groove, beveled 4 sides
Warranty	www.rivaspain.com/resources
Maintenance & Instructions	www.rivaspain.com/resources

Certificates



TIERA

SCULPTED BY NATURE

COLOR	WIDTH	GRADE
Roca	7 1/2"	Select

DESCRIPTION

Product: Multi-layer Engineered Hardwood
Flooring - Planks

COMPOSITION

Engineered for superior stability and durability, the structure combines a high-performance Marine-Grade Phenolic Birch Plywood core with White Oak top layer. Both layers are bonded with polyvinyl acetate adhesives in accordance with CARB Phase 2 compliance standards.

PRODUCT DIMENSIONS

Total thickness (in)	5/8" (15mm)
Top Layer thickness (mm)	4 mm
Plywood thickness (mm)	11 mm
Length	75" - 75% fixed lengths
Width (in)	7 1/2"

DIMENSIONS TOLERANCES

Length	Nominal $\pm$ 0.1%
Width	Nominal $\pm$ 0.2%
Cupping	0.2% of nominal width
Banana	0.1% nominal length

BOX INFORMATION

Pcs/box	4
Weight/box	34.4
Sq.ft./box	15.54



GRADE

Select, solid knots up to 10 mm permitted in less 10% of the material. Open knots with fill, not permitted. Repaired cracks or splits within the planks are not permitted. No filled cracks/splits on the ends of the planks. Natural color variation is to be expected. Sapwood may be present and allowed if the color blends into the plank. No bleached sapwood allowed.

Finish	PPG UV Lacquer
Impact Resistance	Ø medium of deep 8.59 mm
Dimensional Stability	Movement $\leq$ 0.29%
Formaldehyde Emission	E0. CARB2 Comply
Thermal conductivity	0.14W/moK
Noise & Impact Isolation	ΔL_w : 17 dB
Fire Reaction	Cfl-S1
Profiling System	Tongue & Groove, beveled 4 sides
Warranty	www.rivaspain.com/resources
Maintenance & Instructions	www.rivaspain.com/resources

Certificates



TIERA

SCULPTED BY NATURE

COLOR	WIDTH	GRADE
Roca	7 1/2"	Character

DESCRIPTION

Product: Multi-layer Engineered Hardwood
Flooring - Planks

COMPOSITION

Engineered for superior stability and durability, the structure combines a high-performance Marine-Grade Phenolic Birch Plywood core with White Oak top layer. Both layers are bonded with polyvinyl acetate adhesives in accordance with CARB Phase 2 compliance standards.

PRODUCT DIMENSIONS


Total thickness (in)	5/8" (15mm)
Top Layer thickness (mm)	4 mm
Plywood thickness (mm)	11 mm
Length	75"- 75% fixed lengths
Width (in)	7 1/2"

DIMENSIONS TOLERANCES

Length	Nominal $\pm$ 0.1%
Width	Nominal $\pm$ 0.2%
Cupping	0.2% of nominal width
Banana	0.1% nominal length

BOX INFORMATION

Pcs/box	4
Weight/box	34.4
Sq.ft./box	15.54

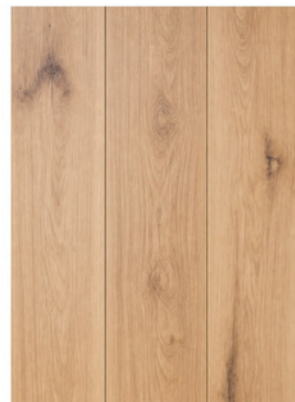

GRADE

Character solid knots up to 3" (70mm) permitted. Open knots with fill less than 2" (50mm). Repaired cracks or splits within the planks are permitted. No filled cracks/splits on the ends of the planks. Natural color variation is to be expected. Sapwood may be present and allowed if the color blends into the plank. No bleached sapwood allowed.

Finish	PPG UV Lacquer
Impact Resistance	Ø medium of deep 8.59 mm
Dimensional Stability	Movement $\leq$ 0.29%
Formaldehyde Emission	E0. CARB2 Comply
Thermal conductivity	0.14W/moK
Noise & Impact Isolation	Δ Lw: 17 dB
Fire Reaction	Cfl-S1
Profiling System	Tongue & Groove, beveled 4 sides
Warranty	www.rivaspain.com/resources
Maintenance & Instructions	www.rivaspain.com/resources

Certificates

